



1-800-367-1492 • www.cpcsigns.com



Construction Work Zone

Cones & Cone Bars



Traffic Cones


- ◆ Flexible Bright Fluorescent Orange, Lime, Blue or White PVC
- ◆ Many Sizes and Reflective Collars available.
- ◆ Some sizes require minimum quantity order, call for details.

RSPCC1803WLN	RSPCC1803WON	RSPCC1803WLR06	RSPCC1803WOR06	RSPCC2807SOR46	RSPCC2807SOR46	RSPCC2807WON	RSPCC2807WON	RSPCC2807WOR46	RSPCC2807WLN	RSPCC2807WLR46	RSPCC2807WWHN	RSPCC2807WWHR46	RSPCC2807WBUN	RSPCC2807WBUR46	RSPCC3610WON
18" 3# Wide Body Lime No Reflective	18" 3# Wide Body Orange No Reflective	18" 3# Wide Body Lime REFLECTIVE 6"	18" 3# Wide Body Orange Reflective 6"	28" 7# Slim Body Orange Reflective 4" & 6"	28" 10# Slim Body Orange Reflective 4" & 6"	28" 7# Wide Body Orange No Reflective	28" 7# Wide Body Orange Reflective 4" & 6"	28" 10# Wide Body Orange Reflective 4" & 6"	28" 7# Wide Body Lime No Reflective	28" 7# Wide Body Lime Reflective 4" & 6"	28" 7# Wide Body White No Reflective	28" 7# Wide Body White Reflective 4" & 6"	28" 7# Wide Body Blue No Reflective	28" 7# Wide Body Blue Reflective 4" & 6"	36" 10# Wide Body Orange No Reflective



Cone Bars provide an Instant Barrier in Seconds!!

RSPCCZCB6OW - Orange/White
RSPCCZCB6YB - Yellow/Black



- ◆ Use on Cones and Knob-top Delineators
- ◆ Extends from 3.8'-6'
- ◆ Ultra lightweight - 1.35 lbs.
- ◆ Engineer Grade Reflective
- ◆ Made from ABS Plastic and are reusable



Cone Holder

RSPCCZHOLDER


- ◆ Size: 6.75" w x 22" h
- ◆ Vehicle Bumper Mount for 18" and 28" Cones.
- ◆ Ideal for utility and fire trucks.
- ◆ Holds no more than ten (10) 18" cones or five (5) 28" cones.
- ◆ Hardware not included.



LoPro Airport Barricades • Barricade Sheeting

LoPro Airport Barricades

- ◆ A Low-profile, 8' long x 10" high, interlocking barricade system used to close taxiways, runways, and delineate construction areas.
- ◆ Durable construction, connectors are molded into the barricade, no pins to lose
- ◆ Accepts two styles of warning lights and has (2) two flag mounts.
- ◆ Stackable for transportation and storage
- ◆ FAA Advisory Circular No. 150/5370-2F compliant

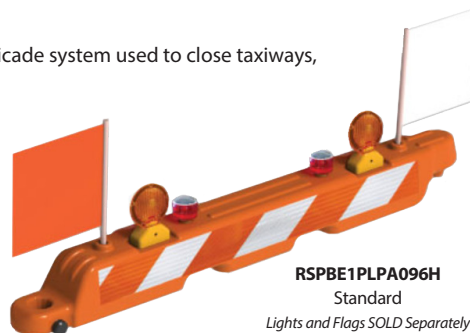

RSPBE1PLPA096H

Standard
Lights and Flags SOLD Separately

Specifications	Standard	Additional Options Available
Color	Orange	Custom Colors with minimum purchase
Reflective Area	72" x 6"	NONE
Stripe Size	6"	NONE
Reflectivity	HIP	DG -or- NO Reflective Sheeting
Weight	25 lbs	Fill with water, up to 220 lbs (26 gallons)



LO-PRO™
AIRPORT BARRICADE

- ◆ 50 Yard Rolls
- ◆ Engineer Grade (E) in 6" or 8" widths
- ◆ High Intensity Prismatic (H) in 8" wide
- ◆ Diamond Grade Cube (3) in 7.75" wide
- ◆ Specify 4" (4) or 6" (6) stripe and right (R) or left (L) slant where appropriate

50 Yard Roll Part #	Width & Type	Stripe Width	Colors
RSHCN8117(L)60650	6" (E)	6"	O/W
RSHCN8117(L)40850	8" (E)	4"	O/W
RSH446(L)077550	7.75" (3)	6"	O/W
RSHCN8117(L)60850SC	8" (E)	6"	O/W
RSH3334(L)0850	8" (H)	4"	O/W
RSH3336(L)0850	8" (H)	6"	O/W
RSHCN8115(L)60850SC	8" (E)	6"	R/W
RSHCN515(L)60850	8" (H)	6"	R/W

RSPCC42PWOH46
Standard

Watchtower Cone



- ◆ 42" tall (46.25" with handle)
- ◆ Stack up to 20% more on your truck with new compact nesting design.
- ◆ Strong, ergonomic handle speeds placement on job, as it fits two hands which makes lifting with base easier. Also, it's easy to string caution tape through handles.
- ◆ Recessed area protects sheeting.
- ◆ Accepts same bases as our Navicade™ delineator which can reduce your base inventory. 10, 16, or 30 lb. recycled rubber bases available.
- ◆ Customize with your company name or logo
- ◆ NCHRP-350 Accepted, Meets MUTCD Standards

Specifications	Standard	Additional Options Available
Body Color	Orange	NONE
Stripe Width	1 each of 4" & 6" HIP	2 each 4" White & 4" Orange -or- 2 each 4" White
Stripe Color	White	Alternating Orange & White
Reflectivity	HIP	NONE -or- DG
Base	16 lbs Rubber	10 lbs. or 30 lbs.

RSPCTPO42D3
Standard



Open Top Delineator



- ◆ Quick and easy set-up
- ◆ Reflective Bands, 2 each - 3" or 4" wide
- ◆ Flange on bottom grabs base for tight fit, 5.375" diameter
- ◆ Post Diameter: 4"
- ◆ Recycled rubber bases: 8 lbs, 10 lbs, 12 lbs, and 18 lbs
- ◆ 2 Sizes: 42" H - weight 1.7 lbs
28" H - weight 1.1 lbs
- ◆ NCHRP-350/MASH Accepted and Meets MUTCD Standards

Specifications	Standard	Additional Options Available
Height/Weight	42" / 1.7 lbs	28" / 1.1 lbs
Reflectivity	ENG	NONE -or- HIP -or- DG
Band (Stripe Width)	2 each - 3"	2 each - 4"
Base	8 lbs	10 lbs, 12 lbs, 18 lbs
Handle	NONE	Upgrade to the Knob-Top Delineator

Available Bases
RSPCTPZB(XX)
(08) 8 lbs | (10) 10 lbs
(12) 12 lbs | (18) 18 lbs

Gemstone™ Vertical Panel



RSPCV08244ORE
Standard

- ◆ Oversized handle with comfort grip
- ◆ Designed to withstand repeated impacts with minimal damage to vehicles or unit
- ◆ Recessed panel protects reflective sheeting, 8"W x 24" H, 34" H, OR 36" H
- ◆ Flashing light mounting receptacle
- ◆ Available in orange and white
- ◆ Solid recycled rubber bases with carrying handles come in two sizes: 20 lbs. and 30 lbs.
- ◆ Size: 15.4"W x 45"H Weight: 4 lbs.
- ◆ NCHRP-350 Accepted and Meets MUTCD Standards



RSPCVZBASE20
20 lb. base



RSPCVZBASE30
30 lb. base



The handle is easy to grab even with the light attached



Sidewall design adds strength and durability

Specifications	Standard	Additional Options Available
Color	Orange	White
Reflective Area	8" x 24"	8" x 34"-or- 8" x 36"
Stripe Size	4" for 8" x 24", 6" for 8" x 34" and 8" x 36"	4" for 8" x 34" and 8" x 36"
Reflectivity	ENG	HIP -or- DG
Base	20 lbs	30 lbs
Stencil	NONE	Name or Logo on Plastic Panel or Molded into Base



RSPCTJM42HN(XX)

Black (BK) | Lime (LI) | Green (GR) | Blue (BU) | White (WH) | Yellow (YE) | Red (RE)

Colored Dome-Top Delineators

- ◆ Designed to look like a bollard, they are perfect for hotels, schools, churches, parking lots, valet parking and more! Beautiful rich color options make the uses for these delineators endless.
- ◆ Made of a special LDPE formula, these Delineators are strong where you need them to be and flexible enough to bounce back from tough impacts.
- ◆ Recycled rubber bases: 8 lbs or 12 lbs, SOLD separately.
- ◆ Easy set up and take down. An affordable option to help with vehicle and crowd control. Works in conjunction with Cone Bars.
- ◆ Bases are re-vulcanized rubber and have a nice clean look.
- ◆ Tubes have UV stabilizers to ensure they hold their color in the harshest conditions
- ◆ 3M Prismatic reflective sheeting.




Available Bases
RSPCTJZB(XX)
(08) 8 lbs | (12) 12 lbs



Specifications	Quick SHIP	Additional Options Available
Height	42"	42"
Reflectivity	HIP	NONE -or- ENG -or- DG
Band (Stripe Width)	2 Each - 3"	NONE
Rubber Base	8 lbs	12 lbs
Color	Black and Lime	Red, Yellow, Blue, White, Green

Caution Tape

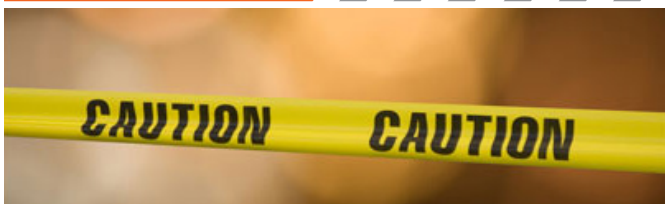

RSP710(X)



- ◆ 3 mil : 3" x 1000' Poly barrier tape provides warning of temporary safety hazard
- ◆ Economical, strong, and disposable
- ◆ Legends (X):
(A) Caution Caution
(B) Police Line Do Not Cross
(F) Caution Do Not Enter
- ◆ Other sizes and legends available

Channelizers



Knob-Top 4" Delineator

- ◆ Height 45" x Width 4"
- ◆ Knob Top for easy handling
- ◆ Accepts cone bars
- ◆ Caution tape wraps around knob
- ◆ Support rings around reflective bands for added tape protection
- ◆ Made from low density polyethylene Fluorescent Orange plastic
- ◆ 8 lb. base is standard and included in price, other sizes available upon request.

RSPCTJK42H08



Channelizer Cone

- ◆ Plasticade Navicade Brand
- ◆ High Density Polyethylene
- ◆ 4 - 6" Tall High Intensity Orange and White Reflective stripes
- ◆ 3 lbs. / 49.25" H x 7.6" W
- ◆ 16 lb. Recycled rubber base included in 6" HIP version.
- ◆ Unique handle is easy to grab even with flashing light or sign attached
- ◆ Stackable with or without base for easy transportation or storage
- ◆ Molded-in holes for mounting lights and signs
- ◆ NCHRP-350/MASH Accepted and Meets MUTCD Standards

RSPCC42NH4616
16 lb. base



30 lb. base (below)

Specifications	Standard	Additional Options Available
Stripe Width	4 Each - 6"	4 Each - 4" -or- 1 Each - 4" and 6"
Reflectivity	HIP	DG -or- DG/HIP Combo -or- ENG
Base	16 lbs.	30 lbs.
Stencil	NONE	Name or Logo Molded into Base

Channelizer Commander™ Traffic Drums



RSPCD100HI46
RSPCD100ZBTIRE

New Power Dome Handle:
gentle slope of dome merges with handle

New Light Mounting Design: light easily turns for stacking



New Tire Locking Ring Design:
Inhibits movement of drum on road surface; textured skirt increases friction and grabs tire; anti-roll design, flat sections on two sides

- ◆ Available in High and Low Density Polyethylene
- ◆ Five Tier Design with (2) 6" Tall Orange and (2) 6" Tall White High Intensity Reflective Stripes
- ◆ 8 lbs. | 39.7"H x 23.5"W
- ◆ NCHRP-350 Accepted/Meets MUTCD Standards

Specifications	Standard	Additional Options Available
Stripe Width	(2) 6" Orange / (2) 6" White	(2) 4" Orange / (2) 4" White
Reflectivity	HIP	DG -or- ENG
Density	HIGH	LOW
Base	Tire Ring	Also available in version compatible with Snap On Rubber Base
Stencil	NONE	Molded in Name or Logo

Type I & II Barricades



TYPE I - Standard
RSPB1PMP1WHE0806



TYPE II - Standard
RSPB1PMP2WHE0808




Purchase barricades fully assembled or as component parts.

Names can be stenciled on blank panels for identification.

Leg hinge hole accepts 1/2" light mounting bolt

Combocade™ Type I and Type II Barricade

- ◆ Steel leg barricade with your choice of aluminum, plastic, or plywood boards
- ◆ Boards and legs can be replaced, legs can be repaired
- ◆ 45" steel legs, 14 gauge thickness, galvanized - white powder coated finish available by special order
- ◆ Plastic boards are strong and dense, will not bend, warp, crack, splinter, or peel
- ◆ Bolt holes are molded into the plastic boards
- ◆ Dimensions: 24.4" W x 42.6" H | Board Sizes Available: 8" x 24" and 12" x 24"
- ◆ NCHRP-350 Accepted/Meets MUTCD Standards



Specifications	Standard	Additional Options Available
Reflectivity	ENG	HIP -or- DG
Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
Reflective Area Type II Barricade	8" x 24" Top Panel 8" x 24" Bottom Panel	12" x 24" Top Panel 8" x 24" Bottom Panel
Usage	Type I or Type II Barricade	Safety Signage
Stencil	NONE	Recommended for Type I Only
Purchase Option	Complete Barricade	Replacement Parts

Econocade® Type I and Type II Barricade



RSPB1PPPE2WHE0808
TYPE II

- ◆ One piece solid construction
- ◆ Size: 24.4" x 42.6"
- ◆ Easy to handle, pack, and transport.
- ◆ Rust free and impact resistant.
- ◆ Bottom rail can carry a sand bag.
- ◆ Two flashing light receptacles
- ◆ White in Stock. Also available in Orange, Yellow, Red, Blue and Green.
- ◆ NCHRP-350 Accepted and meets MUTCD Standards



RSPB1PPPE1WHE08
TYPE I

The Econocade Barricade can be purchased in a variety of colors.



Specifications	Standard	Additional Options Available
Body Color	White	500 Piece Minimum: Orange, Red, Yellow, Green or Blue
Reflectivity	ENG	HIP -or- DG
Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
Reflective Area Type II Barricade	8" x 24" Top Panel 8" x 24" Bottom Panel	12" x 24" Top Panel 8" x 24" Bottom Panel
Usage	Type I or Type II Barricade	Safety Signage
Stencil	NONE	Recommended for Type I Only

Plasticade® Type I and Type II Barricade



RSPB1PPPL2WHH08
TYPE II

- ◆ Premium Plasticade Barricade
- ◆ Withstands repeated impacts
- ◆ Molded-in handles with mounting holes for attaching flashing lights
- ◆ "Click lock" hinges for a positive interlock in the open position
- ◆ Internal ballasting, up to 10 lbs. of sand
- ◆ Sandbag bar (for additional weight)
- ◆ White in Stock. Also available in Orange and Yellow.
- ◆ All grades of reflective sheeting available.
- ◆ Stacking lugs keep units from sliding when stacked
- ◆ NCHRP-350 Accepted and meets MUTCD Standards



RSPB1PPPL1WHH08
TYPE I



RSPB1PPPL2WHH12
TYPE II

Specifications	Standard	Additional Options Available
Body Color	White -or- Orange	Yellow
Reflectivity	HIP	ENG -or- DG
Reflective Area Type I Barricade	8" x 24" Top Panel	12" x 24" Top Panel
Reflective Area Type II Barricade	8" x 24" Top Panel 8" x 24" Bottom Panel	12" x 24" Top Panel 8" x 24" Bottom Panel
Usage	Type I or Type II Barricade	Sign Stand with Sign Sleeve Option -or- Safety Signage
Stencil	NONE	Recommended for Type I Only



Add a Sign Sleeve to use as a sign stand



Stenciling Available

Omni™ A-Frame Type I & II Barricade


- ◆ Perfect for crowd control and road closures
- ◆ Versatile Omni™ A-Frame accepts Plasticade® 1" x 8" Barricade Boards and I-Beam Boards
- ◆ 20% heavier than the Plasticade® A-Frame barricade leg with a solid wall design
- ◆ Stacking lugs for easy transportation and storage
- ◆ Flashing light mounting receptacle on each leg
- ◆ Use with one or two 1" x 8" boards

Specifications	Omni™ Package	I-Beam Board Package	Options Available
Leg	Omni™ A-frame	Plasticade A-frame	Omni™ A-frame (works with most board styles) -or- Plasticade A-frame (works with I-Beam Board Only)
Board	1" x 8" Barricade Boards of your choice, found on page 82	I-BEAM Board	1" x 8" Barricade Board -or- I-BEAM Board
Board Quantity		2	1 -or- 2
Length		8'	6', 8', 10', 12'
Reflective Sides	(I-Beam Boards also available, call for details)	2	1 -or- 2
Reflectivity		HIP	DG -or- ENG
Stencil	NONE	NONE	NONE -or- Custom Stencil
Purchase Option	Build a Custom Kit	Pre-Made Kit	Build a Custom Kit, Pre-Made Kit -or- Replacement Parts



I-Beam Board Package RSPBAPAIK096HD2

(2) Plasticade A-Frame Legs and (2) 2" x 8" x 8" I-Beam Boards
Use as a Type I Barricade (left) -or- as a Type II Barricade (right)

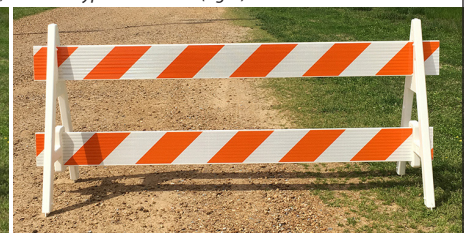

Omni™ Package

RSPBAPA200 Build a Custom Kit with (2) Omni A-Frame Legs and 1" x 8" Barricade Boards of your choice, found on page 82.

Type III Barricades

Telespar® Breakaway System Kits



Breakaway Kit #1 - RSPB3ZBUS1



- ◆ **Welded Riser Design**
- ◆ 14 gauge galvanized steel square post breakaway system
- ◆ 2" Feet & 1.75" Uprights

Kits allow quick removal of uprights from feet for short term or permanent placement. Easy to assemble and replace parts if necessary. Upright accepts a flashing barricade light. **Kits #1-3 Include:**

- ◆ (2) Two - 5' Telespar® Feet
- ◆ (2) Two - 5' Telespar® Uprights
- ◆ (2) Two - 6" Telespar® Stubs
- ◆ (1) One - Hardware Kit - Board to Square Post Upright
- ◆ NOTE: Kit #3 includes 2 complete Shear Pin Breakaway Kits

The **Telespar® Square Posts** shape provides superior wind load capabilities and inhibits warping. Galvanized, hot rolled high carbon steel. Pre-punched mounting 7/16" holes.


Breakaway Kit #2 - RSPB3ZBUS1QR



- ◆ **Welded Riser Design w/ Quick Release Pins**
- ◆ 14 gauge galvanized steel square post breakaway system
- ◆ 2" Feet & 1.75" Uprights




Breakaway Kit #3 - RSPB3ZBUS



- ◆ **Shear Pin Design**
- ◆ 12 gauge galvanized steel square post breakaway system
- ◆ 1.75" Feet & 1.5" Uprights

Choose Options for Barricade Boards (sold separately from Breakaway Kits #1-3)

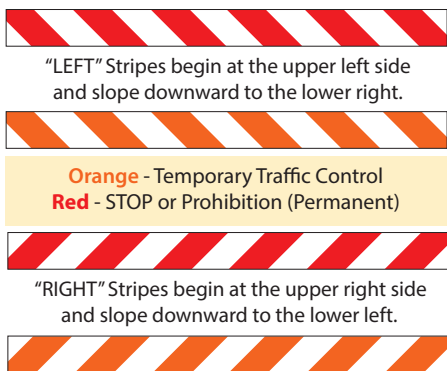

RSPB3Z(XXX)S(X)M(S/D)(L/R)(OW/RW)6

- ◆ 1" thick x 8" wide plastic boards: extruded hollow core with internal walls for strength and durability.
- ◆ **Length (XXX):** (048) 4' | (072) 6' | (096) 8' | (120) 10' | (144) 12'
- ◆ **Sheeting (X):** (H) High Intensity Prismatic (E) Engineer Grade (D) Diamond Grade Sheeting
- ◆ **Sides (S/D):** (S) Single Sided or (D) Double Sided
- ◆ **Stripe Direction (L/R):** Right (R) or Left (L) or omit if (D)
- ◆ **Color (OW/RW):** (OW) Orange/White or (RW) Red/White



TOP SELLER Barricade Board Quick SHIP	
Length	8' (96")
Reflective Sides	1 - Single Sided
Reflectivity	HIP
Stripe Direction	6" Left or Right Stripe
Stripe Color	Orange & White
Stencil	NONE


More Kit Options, Parts & Accessories

Barricade Tape, see page 78.



Angle Iron/ Telespar® Kits

The below components are also available as Kits. Kits include three barricade boards of your choice plus all the hardware needed for assembly.

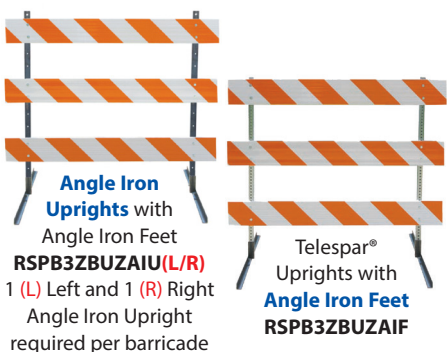

Telespar Foot 2"
14 Gauge w/6" Riser
RSPB3ZBUZTF



Plasticade Volcano Rubber Base
for 1.75" square post
RSPB3ZBUZRV




Plasticade Power Posts
RSPB3ZBUZPPU

Telespar® Uprights

- RSPB3ZBUZTU60
60" H | 1.75" tube | 14 Gauge
RPOSG051215
60" H | 1.5" tube | 12 Gauge
RPOSG0512175
60" H | 1.75" tube | 12 Gauge

Crossmember Stabilizer Bar

1.75"/14 gauge for 8' Type III
RSPB3ZBUZTC70



T-Bracket

RSPB3ZBUZTCHTB

Hardware Kit for T-Bracket and Crossmember

RSPB3ZBUZTCHTBH



Quick Release Pin - 2"
RSPB3ZBUZTFHQRP2



Board to Square Post Upright Hardware Kit
RSPB3ZBUZSPUH

ALL Plastic Type III Barricades

Plasticade® Break-Away

- ◆ Collapsible, lies flat for storage and transport
- ◆ Available with 5 board lengths: 1" x 8" boards, 4', 6', 8', 10' or 12' long
- ◆ Easier to transport, install, and store than wood or steel Type III Barricades
- ◆ Accepts two flashing lights
- ◆ Boards are available sheeted (one or both sides) or unsheeted
- ◆ Barricades are sold in kits with hardware included or as component parts
- ◆ NCHRP-350 Accepted, Meets MUTCD Standards



Sentinel™

- ◆ Easy to assemble base consists of 2 pieces, upright and base, that snap together, no hardware required.
- ◆ Available with two board lengths: 1" x 8" boards, 4' or 6' long
- ◆ Boards can be purchased sheeted (on one or both sides) or unsheeted
- ◆ Base can be internally ballasted with sand, sandbags, or water in warmer climates
- ◆ NCHRP-350 Accepted, Meets MUTCD Standards



Plasticade Safety Signage

Easy-Fold Sandwich Boards are a great option for Temporary Traffic Control when ease of use and portability are a must.

- ◆ Choose from 3 sizes and 3 colors: White, Yellow or Orange
- ◆ 51 Standard Legends; *Custom Legends* also available.
- ◆ Hassle-free, guaranteed, professional application available on legends.
- ◆ Available as a blank, single or double sided.
- ◆ Sheeting: High Intensity (H), Diamond Grade (D) or Engineer Grade (E)
- ◆ School Zone Sign Sheeting: FYG VIP only (D)
- ◆ May be internally ballasted with sand.



Narrowcade®

Holds signs 12"W x 24"H
Dimensions: 45"H x 13"W
Item #C165 Weight: 11 lbs.

Minicade®

Holds signs 12"W x 24"H
Dimensions: 36"H x 13"W
Item C155 Weight: 10 lbs.

Signicade®

Holds signs 24"W x 36"H
Dimensions: 45"H x 25"W
Item C130 Weight: 18 lbs.

Specifications	Standard	Additional Options Available
Colors	White	Orange or Yellow
Reflectivity	ENG	HIP -or- DG
Usage	Barricade and Vertical Panel	Safety Signage
Flashing Light	NONE	Flashing Light attachment available

C130 -or- C155 -or- C165 ↓ STAND OPTION	(X1) ↓ LEGEND SIDE 1	(X2) ↓ LEGEND SIDE 2	H -or- E -or- D ↓ REFLECTIVE OPTION
--------------------------------------------------------------	-------------------------------	-------------------------------	----------------------------------------------------------

CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME	CODE	LEGEND/COLOR SCHEME
1005	10 MPH	1049	EXIT →	1102	PARKING LOT CLOSED	1162	STOP
1006	15 MPH	1016L	LEFT ARROW	1104	PARKING LOT FULL	1164	STOP FOR PEDESTRIANS IN CROSSWALK
1007	20 MPH	1016R	RIGHT ARROW	1120	ROAD CLOSED	1170	STOP POLICE CHECK POINT
1133	SLOW - Vertical	1073	← KEEP LEFT	1080	LANE CLOSED	1142	SLOW POLICE CHECK POINT AHEAD
1443	SLOW - Horizontal	1074	KEEP RIGHT →	1092	NO LEFT TURN	1177	STOP SOBRIETY CHECK POINT
1465	SLOW WORK ZONE AHEAD	1043	← DETOUR	1095	NO RIGHT TURN	1150	SLOW SOBRIETY CHECK
1147	SLOW SCHOOL ZONE AHEAD	1044	DETOUR →	1084	MEN WORKING	1148	SLOW SHERIFF CHECKPOINT
9278	SCHOOL CROSSING	1046	DO NOT ENTER	1086	MOWING AHEAD	1134	SLOW ACCIDENT AHEAD
1126	SCHOOL ZONE 10 MPH	1061	FUNERAL NO PARKING	1180	SURVEY CREW AHEAD	1136	SLOW EMERGENCY AHEAD
1127	SCHOOL ZONE 15 MPH	1093	NO PARKING	1190	TREE WORK AHEAD	1140	SLOW PEDESTRIAN CROSSING
1128	SCHOOL ZONE 20 MPH	1098	← PARKING	1191	UTILITY WORK AHEAD	1200	LEFT BARRICADE
1091	← NO EXIT	1099	PARKING →	1196	FLAGMEN AHEAD	1210	RIGHT BARRICADE
1048	EXIT	1100	↑ PARKING	1198	RESERVED		

Barriers & Barricades

Strongwall ADA Pedestrian Barricade



Use Strongwall to create ADA compliant pathway



- ◆ Meets or exceeds ADA Guidelines and MUTCD Standards, no trip hazard for pedestrians
- ◆ Linking sections fit together securely
- ◆ Top Wall - rugged polyethylene
- ◆ Bottom Base - 43 lbs. self weighted black base with carry handle. Stable in windy conditions, no sandbags needed!
- ◆ Modular system can be shaped to any layout and is quick and easy to install
- ◆ Anti-tamper linking system - difficult for unauthorized personnel to dismantle when linked
- ◆ Compact stacking lowers transport costs
- ◆ Available in orange or white with or without retro-reflective sheeting.

43 lb. Base
Eliminates
Sandbags

Single Section w/Base
43" L x 15.5" w x 38" H
Weight: 51 lbs.



RSPCSWPSZB
Base Dimensions
40.4" L x 15.5" W x 12" H

RSPCSWPSAW



Sheeting
Area: 6" x 30"
on both sides

ADA
Compliant

Specifications	Standard	Additional Options Available
Color	Orange	White -or- Alternating Orange & White
Reflective Sides	2	1 on pedestrian side -or- 1 on outside
Reflectivity	NONE	HIP -or- ENG
Use of water or sand bags for stabilization	NONE: the base design eliminates the need	Fillable with up to 33 lbs of water

Sheeting Area
48" x 8" on both sides

Plasticade Water Filled Barricade System

- ◆ Durable construction, impact resistant.
- ◆ Conforms to any roadway design, can turn 90 degrees - linked units secured with connector pin - quick assembly and breakdown.
- ◆ Lightweight - no heavy machinery needed for installation
- ◆ Stackable for transport and storage
- ◆ Can be moved while filled with water
- ◆ Accepts standard warning lights
- ◆ Accepts optional fence panels 54"W fencing with 8'H - 3" diameter posts
- ◆ NCHRP-350 Accepted, Test Level 2, Meets MUTCD Standards
- ◆ Uses: Block off Work Zone Areas from workers and public; Provides visual pathway for vehicles and pedestrians; Perimeter security; Crowd Control



Single Section
60" L x 36" H | Weight Empty: 50 lbs. | Weight Filled: 683 lbs.

Specifications	Standard	Additional Options Available
Color	Orange or White	NONE
Reflective Sides	2	No Reflective
Reflectivity	HIP	NONE -or- ENG
Use of water or sand bags for stabilization	NONE	Fillable with sand or up to 72 gallons of water

Crowdcode Control Barrier

- ◆ Linking bracket accommodates various configurations - units pivot on bracket and adjust to uneven ground
- ◆ Easy stacking, no tangling of feet that rotate flat for stacking
- ◆ Panels on both sides for retro-reflective sheeting
- ◆ Holes for signs to be affixed
- ◆ Sturdy, durable - thick, double wall panel


Sheeting Area 5.5" x 51" on both sides



Single Section w/Feet
74" L x 39.5" H Weight: 32 lbs.
RSPCPCOR6 - Orange
RSPCPCWH6 - White

Crowdcode Deluxe Control Barrier

- ◆ Double locking hooks accommodate various configurations - units pivot on hooks and adjust to uneven ground
- ◆ Stands up to large crowds with steel legs integrated with barricade panel to prevent top-over.
- ◆ Unique Quick-Change™ system makes it easy to insert signs
- ◆ Sturdy and extra durable - Feels as solid as steel, but won't rust - 50% thicker double wall panel, prevents warping or bending. (when compared to Crowdcode)

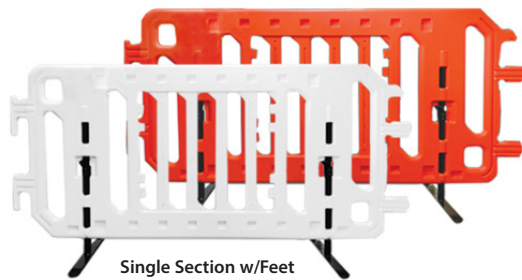

Single Section w/Feet
86.25" L x 42" H Weight: 51 lbs.
RSPCPCOR7 - Orange
RSPCPCWH7 - White

NON
CONDUCTIVE
No Metal
Used

Safegate Manhole Guard

RSPCSCB5GMG



Single Unit
29.5" L x 39.4" H
Weight: 4.4 lbs.

- ◆ Ideal for Utility Work
- ◆ Non-conductive (dielectric), no metal used
- ◆ Great for protecting any area requiring temporary restriction of access
- ◆ Hinged clips make it easy to configure sections into rectangles of various sizes - locking clamp to be used for straight sections
- ◆ Folds up for storage and sets up quickly
- ◆ Carry handles for transport
- ◆ Longer life than metal, replacement sections available
- ◆ Available in yellow

Trench Covers & Curb Ramps

• Lighter than Steel • Stronger than Wood • Anti-Slip Surface • Deters Metal Thieves •




Trench Covers - 27" or 35"

- ◆ Two sizes - designed to cover trenches up to 27" or 35".
- ◆ Takes the vehicle weight up to 4,410 lbs.
- ◆ Beveled edge prevents tripping
- ◆ Molded from a single piece of fiberglass composite - underside has ribbed framework for added strength
- ◆ Recommended bolting to road surface



Specifications

Traffic Type	Vehicle & Pedestrian	Pedestrian Only
	27" Trench Cover 35" Trench Cover Road Plate	Ped Trench Cover SafeKerb Ramp
Trench Widths	Up to 27" Wide	Up to 35" Wide
	27" Trench Cover 35" Trench Cover Road Plate Ped Trench Cover	35" Trench Cover Road Plate
Vehicle Weight Limit	Up to 4,410 Lbs	Up to 14,520 lbs per wheel
	27" Trench Cover 35" Trench Cover Road Plate	Road Plate

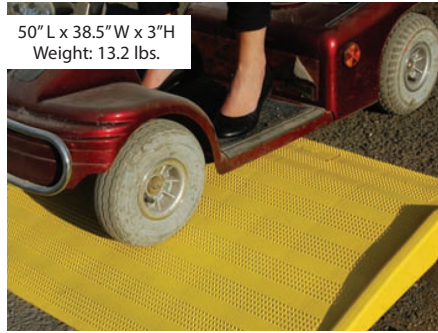

SafeKerb Ramp

- ◆ Adapts to curb heights from 3" to 6.3"
- ◆ Withstands loads up to 553 lbs.
- ◆ Raised sides prevent vehicle run off
- ◆ Molded from high density polyethylene
- ◆ Stacks for transport and storage
- ◆ Bolt to road and walkway surface for added stability



Pedestrian Trench Cover

- ◆ Pedestrians Only - takes up to 553 lbs.
- ◆ Covers trenches up to 27.5"
- ◆ Smooth rubber edge greatly reduces tripping hazard
- ◆ Resists sliding, no need to bolt down - flexible material which grips the surface underneath

Road Plate

- ◆ Easy to install modular system with no special equipment needed, weighs 97 lbs. per section
- ◆ Tested to vehicle weights of 96,800 lbs - Single wheel load, 14,520 lbs.
- ◆ No rust or corrosion
- ◆ Long lasting polymer material
- ◆ No "rattle" from crossing vehicles
- ◆ Design slows traffic for increased safety
- ◆ Features "Drop Pins" that increase stability - pins protrude into trench preventing lateral movement of plate
- ◆ Steel linking brackets lock sections together
- ◆ End sections must be bolted to ground in order to lock unit into position
- ◆ Stacks securely for transportation and storage

CONSTRUCTION WORK ZONE

Safety Vests

Economy Safety Vest

ANSI/ISEA 107-2015 Class 2

RSAGV2EOSDVM(XX)N Orange
RSAGV2ELSDVM(XX)N Lime
Zipper Closure Vest
with Reflective Striping.

RSAGV2EOSDZM(XX)N Orange
RSAGV2ELSDZM(XX)N Lime
Hook & Loop Closure
Mesh Vest with
Reflective Striping.

Specify Size (XX)
(L), (XL), (2X)



Two-Tone Safety Vests

ANSI/ISEA 107-2010 Class 2

RSAGV2SLSZM(XX)N - Lime
RSAGV2SOSZM(XX)N - Orange

Hook & Loop Closure,
Reflective Striping,
Contrasting Trim &
1 Upper Left Front
Pocket and 1 Lower
Right Inside Pocket.

Specify Size (XX)
(M) fits M, (L) fits L,
(XL) fits XL, (2X) fits 2XL



Premium Safety Vest

ANSI/ISEA 207-2006 Class 3/Type R

RSAGV35PBLSSZM(XX)N - Lime

5-Point Breakaway with
Zipper Front Closure,
Reflective Stripes,
Contrasting Trim,
2 Upper Outside
Pockets and 2 Lower
Inside Pockets.

Specify Size (XX):
(ML) fits M-L,
(XL2X) fits XL-2XL
(3X5X) fits 3XL-5XL



0
DAYS

Construction Work Zone Signs



CWZ Signs can
be ordered with
 500 ft (05)
 1000 ft (10)
 1500 ft (15)
 1/2 mile (5M)
 1 mile (1M)
 Ahead (AH)
 _00 FT (F)
 (Blank Space) (B)
 Example:
 S4848W202(AH)(X)AC

Huge Selection*
 IN STOCK
 READY TO
 SHIP SIGNS



S3030W202(X)(X)AC
 S3636W202(X)(X)AC
 S4848W202(X)(X)AC



S3030W203(X)(X)AC
 S3636W203(X)(X)AC
 S4848W203(X)(X)AC



S3030W204(X)(X)AC
 S3636W204(X)(X)AC
 S4848W204(X)(X)AC



S3030W205L(X)(X)AC
 S3636W205L(X)(X)AC
 S4848W205L(X)(X)AC



S3030W205R(X)(X)AC
 S3636W205R(X)(X)AC
 S4848W205R(X)(X)AC



S3030W213(X)(X)AC
 S3636W213(X)(X)AC
 S4848W213(X)(X)AC



S3030W201(X)(X)AC
 S3636W201(X)(X)AC
 S4848W201(X)(X)AC



S3030W217(X)(X)AC
 S3636W217(X)(X)AC
 S4848W217(X)(X)AC



S3030W205AL(X)(X)AC
 S3636W205AL(X)(X)AC
 S4848W205AL(X)(X)AC



S3030W205AR(X)(X)AC
 S3636W205AR(X)(X)AC
 S4848W205AR(X)(X)AC



S3030W215BL(X)(X)AC
 S3636W215BL(X)(X)AC
 S4848W215BL(X)(X)AC



S3030W215BR(X)(X)AC
 S3636W215BR(X)(X)AC
 S4848W215BR(X)(X)AC

*Call customer service for current availability. 48" Signs Must Ship Truck Line.



Reverse Curve Left
 S4848W14L(X)AC



Reverse Curve Right
 S4848W14R(X)AC



Merge Left
 S4848W41L(D)AC



Merge Right
 S4848W41R(D)AC



Lane Reduction Left
 S4848W42L(X)AC



Lane Reduction Double
 S4848W42D(X)AC



Lane Reduction Right
 S4848W42R(X)AC



S3648W143(X)AC



Flagman Symbol
 S3030W207(X)AC
 S3636W207(X)AC
 S4848W207(X)AC



SNON4848W207B(X)AC



S3030W34(X)AC
 S3636W34(X)AC
 S4848W34(X)AC



Men Working Symbol
 S3030W211(X)AC
 S3636W211(X)AC
 S4848W211(X)AC



S3030W811(X)AC
 S3636W811(X)AC
 S4848W811(X)AC



S3030W812(X)AC
 S3636W812(X)AC
 S4848W812(X)AC



S3030W93(X)AC
 S3636W93(X)AC
 S4848W93(X)AC



S3030W215(X)AC
 S3636W215(X)AC
 S4848W215(X)AC



S2424W211B(X)AC
 S3030W211B(X)AC
 S3636W211B(X)AC
 S4848W211B(X)AC



S3030W211C(X)AC
 S3636W211C(X)AC
 S4848W211C(X)AC



S3030W212(X)AC
 S3636W212(X)AC
 S4848W212(X)AC



S3030W212T(X)AC
 S3636W212T(X)AC
 S4848W212T(X)AC



S3030W215AL(X)AC
 S3636W215AL(X)AC
 S4848W215AL(X)AC



S3030W215AR(X)AC
 S3636W215AR(X)AC
 S4848W215AR(X)AC



S3030W216(X)AC
 S3636W216(X)AC
 S4848W216(X)AC



S3030W221(X)AC
 S3636W221(X)AC
 S4848W221(X)AC



S3030W241(L)(X)AC
 S3636W241(L)(X)AC
 S4848W241(L)(X)AC



S3030W241A(R)(X)AC
 S3636W241A(R)(X)AC
 S4848W241A(R)(X)AC



S3030W241B(R)(X)AC
 S3636W241B(R)(X)AC
 S4848W241B(R)(X)AC



S1818W131P10(X)AC
 S2424W131P10(X)AC



S1818W131P15(X)AC
 S2424W131P15(X)AC



S1818W131P20(X)AC
 S2424W131P20(X)AC



S1818W131P25(X)AC
 S2424W131P25(X)AC



S1818W131P30(X)AC
 S2424W131P30(X)AC



S1818W131P35(X)AC
 S2424W131P35(X)AC



S1818W131P40(X)AC
 S2424W131P40(X)AC



S1818W131P45(X)AC
 S2424W131P45(X)AC

0
DAYS

Replacement Requirements*

Work Zone signs should only be used in "new" or "like new" condition and replaced immediately if missing, damaged or deteriorated. While they are temporary signs, condition is extremely critical because travel through work zones can be hazardous with unexpected or unusual conditions.

*Maintenance of Signs and Sign Support: FHWA-SA-09-025

Are Your Signs Bright Enough?

All Ground Mounted Warning Signs MUST be Type II Reflective or better. All Roll-Up Signs used at night MUST be retro-reflective. To stay in compliance with the MUTCD, we recommend using:

3M Fluorescent Orange VIP or Orange HIP for all **Work Zone Signs** for the best overall value and warranty included.

Fluorescent Orange
VIP

Orange
HIP



"Crashworthy" Barricade Signs

0 DAYS

Substrates (S):

(M3) ACM (radius corners & holes)

(A) .080" Aluminum (radius corners & holes)

(C04) 4MM Coroplast (straight corners)

(C10) 10MM Coroplast (straight corners)

3M Reflective Sheeting (X):

(3) DG3 Diamond Grade Cubed

(D) VIP Diamond Grade

(H) High Intensity Prismatic

- ACM and Coroplast Signs are crashworthy when mounted on a Type III Barricade.
- Popular legends shown, available in all 4 substrates. Call customer service for custom legends.

BRIDGE CLOSED
AHEAD
LOCAL TRAFFIC ONLY

S6030R113C(X)(S)

ROAD CLOSED
AHEAD
LOCAL TRAFFIC ONLY

S6030R113A(X)(S)

ROAD CLOSED
TO
THRU TRAFFIC

S6030R114(X)(S)

SIDEWALK CLOSED
CROSS HERE

S2412R911(D)(X)(S)

SIDEWALK CLOSED
USE OTHER SIDE

S2412R910(D)(X)(S)

DETOUR

S4818M410(L)(X)(S)C

END
ROAD WORK

S3618G202(X)(S)C
S4824G202(X)(S)C



S1824W18(X)(S)C
S2430W18(X)(S)C

DETOUR

S2412M48(X)(S)C

END

S2412M48B(X)(S)C



S3618W17(X)(S)C
S4824W17(X)(S)C



S4824W16(X)(S)C

Aluminum
Vertical Panel



S0824OM3(L/R)(H)AC

ACM Sheets

- 3MM Aluminum Composite Material (ACM) is made of two sheets of .021 Aluminum bonded to a thermoplastic core.



RBACM3MM4896WHAL
48" x 96"

- ACM's flat rigid surface and weather resistance ensures long-term performance and durability.
- ACM is lightweight at only .8 lbs per square foot.

ROAD WORK
NEXT 5 MILES


S3618G201B(X)(S)C
S4824G201B(X)(S)C
S6024G201B(X)(S)C
*Specify miles

DETOUR

S3024M49B(X)(S)C



S3024M49B(L)(X)(S)C




S3024M49A(L)(X)(S)C

DETOUR

S3024M49U(X)(S)C



S3024M49(L)(X)(S)C



S3024M49C(L)(X)(S)C

END
DETOUR

S2418M48A(X)(S)C



S4836E52A(X)(S)C



S4836E52(X)(S)C

Temporary CWZ Roll-Up Signs

0 DAYS

LEGEND	
W34	Be Prepared To Stop
W221	Blasting Zone Ahead
W202AH	Detour Ahead
W207AAH	Flagger Ahead
W207	Flagger Ahead Symbol
W207BAH	Flagman Ahead
W42(L/R)	(Left/Right) Lane Ends Merge Symbol
W205(L/R)(D)	(Left/Right) Lane Closed (Distance)
W211D	Litter Crew Ahead
W211B	Men Working
W211C	Mowers Ahead
W204AH	One Lane Road Ahead
W203	Road Closed Ahead
W201(D)	Road Work (Distance)
W213AH	Road Machinery Ahead
SWC	Sheriff's Work Crew
W216AH	Survey Crew Ahead
W214TAH	Tree Work Ahead
W414	Trucks Entering Highway
W217AH	Utility Work Ahead
W211AAH	Workers Ahead
W218AH	Work Area Ahead
W211	Workers Symbol

Quantity
Discounts
Available




A large variety of standard MUTCD legends via drop ship directly from the manufacturer thru trusted and reliable business partnerships.

Choose Sign Options: RMS(XX)(LEGEND)(L/R)(D)(M)

- Size (XX): (36) 36" | (48) 48"
- Legend: Include Left or Right (L/R) or Distances (D) : as required:
• 500 ft (05) • 1000 ft (10) • 1500 ft (15) • 1/2 mile (5M) • 1 mile (1M) • Ahead (AH)
- Sign Types and Material (M):
(D) 3M Diamond Grade | Standard Vinyl Pockets | Ribs Sold Separately
(H) 3M High Intensity | Standard Vinyl Pockets | Ribs Sold Separately
(N) Econo Mesh Non Reflective | Standard Vinyl Pockets | Ribs Sold Separately
(CSD) Marathon Diamond Grade | Compact Wrap & Roll System
(CSH) Super Brite High Intensity | Compact Wrap & Roll System
- Compact Wrap & Roll Signs are part of a Premium Space Saving System that come pre-installed with hinged, integrated cross bracing to work in conjunction with the MDI Compact Sign Stand-RPOTTCSS23612DLK and a Carrying Case to hold one collapsed Sign and the Stand. The sign is already latched into the stand allowing deployment in mere seconds!
- Call Customer Service for more info.

Standard Roll-Up Sign Ribs
SOLD Separately.
Heavy Duty Ribs
available upon request.

RMSR(36/48) (36) 36" or (48) 48"
Roll-Up Sign Ribs

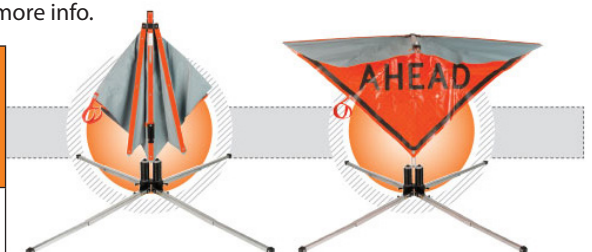

Work Zone Sign Stands



GT2 Tripod Stand



NOTE: The GSS-3 and GT-2 stands have not been tested under the NCHRP-350 guidelines and may NOT be used on Federal or State roads. NCHRP-350 approved tri-pods available upon request.

- ◆ For Roll-Up and Rigid Signs
- ◆ 3 Flag Holders
- ◆ Galvanized Steel
- ◆ 53" High
- ◆ 14 lbs.



GSS3 Galvanized Step Sign Stand



- ◆ For Roll-Up Signs
- ◆ Pointed for ground installation
- ◆ Galvanized Steel
- ◆ 60" High
- ◆ 7 lbs.



Guardrail Clamp

- ◆ Firmly affixes to guard rails for use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions.



RPOTTGDS23
Specify sign type when ordering

Dual Springs



SZ412 Compact Stand



NO Spring



- ◆ For use with 36" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.
- ◆ Above Grade Clearance of 12"
- ◆ Less than 1 cubic foot when stored.
- ◆ Weight: 20 lbs.

WM5012SS Compact WindMaster® Stand



Single Spring

- ◆ For use with 36" & 48" Roll-Up Signs in no wind to high wind speed conditions on low volume, rural or 2-lane roads.
- ◆ Above Grade Clearance of 12"
- ◆ Requires 1 cubic foot of storage space.
- ◆ Weight: 20 lbs.



WM4818K Mid-Size Stand WindMaster®



Dual Springs

- ◆ Above Grade Clearance of 18"
- ◆ Weight: 32 lbs.
- K1 - Roll Up
- K2 - Rigid
- K3 - Dual



Full-Size Stand



- ◆ For use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions on low to high volume, 2 or 4-lane roads.

RPOTTC2SZ412UB
Roll-Up Bracket

RPOTTC2SZ4602S (5' / 60")
RPOTTC2SZ4842S (7' / 84")

2 Sizes:

- ◆ Above Grade Clearance of 5' / 60"
Weight: 42 lbs. | 48 lbs. w/rigid assembly
- ◆ Above Grade Clearance of 7' / 84"
Weight: 44 lbs. | 50 lbs. w/rigid assembly



Median Barrier Clamp

- ◆ For use with 36" & 48" Roll-Up and/or Rigid Signs in no wind to high wind speed conditions.



- ◆ WindMaster® dual springs and telescoping upright.
- ◆ Attaches firmly to median barrier with four, screw-in T-handle spikes.
- ◆ 3- Flag Holder included, flags sold separately.

RPOTTCMBCSA114818K1 - Roll-up Sign Holders | 5"-11" Clamp Range | 39.7 lbs
RPOTTCMBCSA114818K2 - Rigid Sign Holder | 5"-11" Clamp Range | 40.85 lbs.
RPOTTCMBCSA114818K3 - Rigid/Roll-up Sign Holders | 5"-11" Clamp Range
RPOTTCMBCSA154818K1 - Roll-up Sign Holders | 9"-15" Clamp Range
RPOTTCMBCSA154818K2 - Rigid Sign Holder | 9"-15" Clamp Range
RPOTTCMBCSA154818K3 - Rigid/Roll-up Sign Holders | 9"-15" Clamp Range

Safety Flags
see p. 45



Zephyr Stand

- ◆ For use with 36" & 48" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.
- ◆ Above Grade Clearance of 12"
- ◆ Recycled rubber base folds to 4" high & has stacking lugs for easy transport & storage.
- ◆ Molded in carrying handles.
- ◆ Weight: 38 lbs.

RPOTTCR26000USH - Universal Bracket



Barricade Lights



Type A, C, and 3 Way

- ◆ Flasher, steady burn, & OFF
- ◆ 6 Volt battery
- ◆ Incandescent bulb

RSPBL316YY Yellow Lens



Type A & C Solar LED

- ◆ 4-5 year expected life.
- ◆ LED bulbs
- ◆ True Solar Powered light with rechargeable NiMH rechargeable battery included

RSPBL3LSYY Yellow Lens



Type A, C, and 3 Way Solar Assist LED

- ◆ Flasher, steady burn, and OFF
- ◆ 3 Volt high efficiency lights
- ◆ LED bulbs
- ◆ Internal solar panels trickle charge "D" cell alkaline batteries to give a superior long lasting more reliable power source.

RSPBL3LDYYSA Yellow Lens



Type B Solar LED

- ◆ Daytime Use
- ◆ High Intensity Flashing
- ◆ LED bulbs
- ◆ Power Options: Solar panel trickle charges "D" Cell -or- Fully Solar Power Battery

RSPBLBL3YYSA Yellow Lens | D Cell Solar
RSPBLBL3RYSA Red Lens | D Cell Solar
RSPBLBL3YY Yellow Lens | Fully Solar



Type B LED

- ◆ Detachable lens available upon request
- ◆ 6 Volt battery
- ◆ LED bulb

RSPBLBL6YY Yellow Lens
RSPBLBL6RY Red Lens



RSPBLZBATTERY06V
6 Volt Battery

Safety Flags



RSPFLAGVINYL1824
18x18 • 24" dowel

RSPFLAGMESH1824
18x18 • 24" dowel

RSPFLAGVINYL2436
• 24x24 • 36" dowel

- ◆ 18" or 24" Fluorescent Red/ Orange vinyl coated nylon or mesh available
- ◆ 24" flag required for flagging operations
- ◆ 18" or 24" flag suitable to mount above a traffic control sign or device
- ◆ 3/4" wood dowels

Pilot Car Safety



S3618G204(X)AC



Conspicuity Tape

- ◆ 2" x 50 yds with red and white pattern repeats
- ◆ Meets all requirements for marking vehicles

RVSCT983320250



SMV Emblem

RVSSMV10 Aluminum
RVSSMV20 Decal

Barricade Light Brackets

- ◆ Brackets line the light to requirements and have positive stops to eliminate rotation!



- ◆ Brackets allow proper alignment of light
- ◆ I.T.E. Specifications require the lights to be mounted with base of the light perpendicular to the ground line



RSPBLZHB1278L
Left Side
Mounting Bracket



RSPBLZHB1278R
Right Side
Mounting Bracket



RSPBLZHB1276
Center Mounting Bracket

RSPBLZHB1277
Barrier L
Mounting Bracket

RSPBLZHB1277
Z Mounting Bracket
(Not for Diamond Shaped Signs)

Vehicle Mount Sign Holders

Vehicle Grab Bar Mount Sign Holder

- ◆ Easily attaches to the vehicle grab bar and stores in place to stay ready to use in seconds.
- ◆ For use with 36" or 48" Compact Roll-Up Sign. (Sold Separately)
 - Pink Roll-Ups, p. 77
 - Orange Roll-Ups, p. 87
- ◆ Weight: 5 lbs.

RPOTTLA43595
Sign Holder

RPOTTLA43595ZSS - Storage Sleeve for Grab Bar Mount & Sign while mounted to the grab bar



Vehicle Hitch Mount Sign Holder

- ◆ Transforms standard vehicle hitches into sign holders.
- ◆ Fits 2" square hitch receiver.
- ◆ For use with 36" or 48" Compact Roll-Up Sign. (Sold Separately)
- ◆ Ideal for rolling crews.
- ◆ Weight:
 - 7.25 lbs - small
 - 8 lbs - large

RPOTTLA43921 - Large
RPOTTLA43921SU - Small





STOP/Slow Hand Paddles

SAVE MONEY by purchasing one of our Economy, Premium or EZ Connect Hand Paddle Kits.

Custom Hand Paddles available by purchasing individual components of your choice. Use the Customized Easy Order Checklist below to build a hand paddle to your specifications. Paddles are universally punched to accept all handle types in this catalog.

Use STOP/STOP Hand Paddles in School Zones, and STOP/SLOW Hand Paddles at Events, for Incident Management, or in Construction Work Zones.

**ALL
Handles &
Staffs come
with standard
hardware**

Customized Easy Order Checklist

① Paddle Material Aluminum: <input type="checkbox"/> .040" <input type="checkbox"/> .080" ABS Plastic: <input type="checkbox"/> .125"	③ Legend <input type="checkbox"/> STOP/SLOW <input type="checkbox"/> STOP/STOP <i>(School Zone)</i>	⑦ Staff Size and Type <input type="checkbox"/> None <input type="checkbox"/> 60" <input type="checkbox"/> 72" <input type="checkbox"/> Galvanized Steel Conduit <input type="checkbox"/> Wood <input type="checkbox"/> Gray PVC Plastic - <i>must use with 18" PVC handle - the PVC handle and staff have been matched together and tested for a good fit.</i>
② Reflective Type <input type="checkbox"/> (DH) High Intensity Prismatic & Fluorescent Orange Diamond Grade Combo <input type="checkbox"/> (D) ALL VIP Diamond Grade <input type="checkbox"/> (H) ALL High Intensity Prismatic <input type="checkbox"/> (E) ALL Engineer Grade <input type="checkbox"/> NON-Reflective	④ Paddle Size <input type="checkbox"/> 18" x 18" <input type="checkbox"/> 24" x 24" ⑤ Handle Type and Size Galvanized Steel Conduit: <input type="checkbox"/> 10" Wood: <input type="checkbox"/> 12" <input type="checkbox"/> 18" Gray PVC Plastic: <input type="checkbox"/> 18" (12" Grip Area) ⑥ 4.5" Vynafoam Grip <input type="checkbox"/> None <input type="checkbox"/> YES (for conduit handle only)	⑧ Shipping Requirement <input type="checkbox"/> Unassembled - Recommended <input type="checkbox"/> Assembled - oversized freight charges may apply and freight damage is more likely to occur. ALL handles and staffs include appropriate hardware

Value Minded
Non-Reflective
18"x18" hand paddles
made of .040" aluminum
with 10" Galvanized Steel
Conduit Handle
SHP1818SL040BK10C

OPTIONAL
foam grip
for conduit
handles

Vynafoam Grip
HPZFOAMGRIP

- ◆ Use on Conduit Paddle Handles
- ◆ Color: Black • Size: 3/4" diameter X 4.5" long
- ◆ Soft, velvet-like finish with the comfort of foam and durability of vinyl.

STOP/SLOW

Durable Reflective 18" x 18" hand paddles made of .080" aluminum
High Intensity (H) reflective with 60" Conduit Staff
SHP1818SL080HK60C

Connect Hand Paddle Kits

The Leader in Safety and Convenience

.125" Black ABS plastic sign on Gray PVC "Snap Together" plastic handle

NON CONDUCTIVE

SHP(XXXX)SLABS
↓
HEAD SIZE

(X)
↓
REFLECTIVE COMBO

(XX)
↓
HEIGHT

STOP

2 Head Sizes:
18" x 18" (1818) Paddle - 4.6 lbs.
24" x 24" (2424) Paddle - 5.6 lbs.

2 Staff Lengths: 72" (72) or 84" (84) to bottom of sign

The PVC handle and staff which make up the length have been matched together and tested for a good fit.

18" Handle with 12" grip area can be used by itself as a hand paddle or attach to a staff.

Meets Federal Specifications

Non-Conductive, Non-Corrosive, Lightweight

No couplings or threads involved.

EASY Connect or Disconnect in a SNAP!

Choose from 4 Reflective Combinations:

High Intensity Prismatic Fluorescent Orange Diamond Grade Combo (DH)	ALL VIP Diamond Grade (D)	ALL High Intensity Prismatic (H)	ALL Engineer Grade (E)
--------------------------------------------------------------------------------------	-------------------------------------------	--------------------------------------------------	----------------------------------------

Custom Products Corporation

P.O. Box 54091
Jackson, MS 39288-4091
www.cpcsigns.com

PRST STD
U.S. Postage
PAID
Custom Products
Corporation



CATALOG #11 - 2018



Mail:

P.O. Box 54091
Jackson, MS 39288-4091

Shipping:

1120 Flowood Dr.
Jackson, MS 39232

EMAIL

sales@cpcsigns.com



JACKSON
MISSISSIPPI

HOURS OF OPERATION

7:30 am - 5:00 pm CST

Sales:

1-800-367-1492 (Voice)
1-601-932-5854 (Voice)
1-800-206-3444 (Fax)
1-601-932-7178 (Fax)

WEBSITE

www.cpcsigns.com