

Sign Stand Buyers Guide



Compact Stand
- Non-Wind Deflectable, No Spring

Compact Stand
- Wind Deflectable, Single Spring

Mid-Size Stand
- Wind Deflectable, Dual Springs

Full-Size Stand
- Wind Deflectable, Dual Springs

WORK ZONE SIGN STANDS

NCHRP-350 approved with Roll-Up Signs	◆	◆	◆	◆
NCHRP-350 approved with Rigid Signs			◆	◆
For Signs 36" and under	◆	◆	◆	◆
For Signs over 36"		◆	◆	◆
For none to low wind speeds	◆	◆	◆	◆
For medium to high wind speeds		◆	◆	◆
Lower Volume Traffic or Rural Areas: 2-Lane Roads	◆	◆	◆	◆
Medium Volume Traffic Areas: 2-Lane and 4-Lane Roads			◆	◆
Higher Volume Traffic, Urban/Pedestrian Areas: 4-Lane Roads				◆
Placement at side of the road in areas that require a small footprint	◆	◆		
Placement at side of the road above sidewalks in business, commercial, or residential areas where parking or pedestrians are likely	◆	◆	◆	◆
For clear line of sight conditions	◆	◆	◆	◆
For various line of sight conditions			◆	◆
For obstructed line of sight conditions			◆	◆
For above grade clearances of 12" - 18"	◆		◆	
For above grade clearance of 16" - 17"		◆		
For above grade clearance of 5 ft				◆
For above grade clearance of 7 ft				◆

Did You Know?

MUTCD 2009 CHAPTER 6F

- ◆ All portable sign stands used in temporary traffic control areas *MUST* be NCHRP-350 crashworthy.
- ◆ The minimum of above grade clearance for sign stands is 12" above the traveled roadway.
- ◆ Sign stands that do not meet the mounting heights of 5ft or 7ft should not be used for a duration of more than 3 days and are recommended for "short term" or "daylight operations".
- ◆ Ground mounted sign supports are ideal for projects lasting more than 3 consecutive days.



VOICE: 1-800-367-1492 • FAX: 1-800-206-3444
sales@cpcsigns.com • www.cpcsigns.com

JACKSON, MISSISSIPPI

STANDARD **GT2 Tripod Stand**



NOTE: The GSS-3 and GT-2 stands have not been tested under the NCHRP-350 guidelines and may NOT be used on Federal or State roads. NCHRP-350 approved tri-pods available upon request.

- ◆ For Roll-Up and Rigid Signs
- ◆ 3 Flag Holders
- ◆ Galvanized Steel
- ◆ 53" High
- ◆ 14 lbs.

SUPER ECONOMY **GSS3 Galvanized Step Sign Stand**



- ◆ For Roll-Up Signs
- ◆ Pointed for ground installation
- ◆ Galvanized Steel
- ◆ 60" High
- ◆ 7 lbs.



STANDARD **Guardrail Clamp**



- ◆ Firmly affixes to guard rails for use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions.



RPOTTGDS23
Specify sign type when ordering

Dual Springs

STANDARD **SZ412 Compact Stand**



- ◆ For use with 36" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.
- ◆ Above Grade Clearance of 12"
- ◆ Less than 1 cubic foot when stored.
- ◆ Weight: 20 lbs.

STANDARD **WM5012SS Compact WindMaster® Stand**



Single Spring

- ◆ For use with 36" & 48" Roll-Up Signs in no wind to high wind speed conditions on low volume, rural or 2-lane roads.
- ◆ Above Grade Clearance of 12"
- ◆ Requires 1 cubic foot of storage space.
- ◆ Weight: 20 lbs.




STANDARD **WM4818K Mid-Size Stand WindMaster®**



- ◆ Above Grade Clearance of 18"
- ◆ Weight: 32 lbs.

- ◆ 3 Flag holders included.


K1 - Roll Up
K2 - Rigid
K3 - Dual

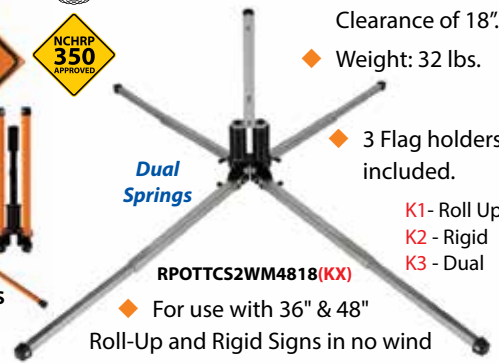

STANDARD **Full-Size Stand**



- ◆ For use with 36" & 48" Roll-Up and Rigid Signs in no wind to high wind speed conditions on low to high volume, 2 or 4-lane roads.

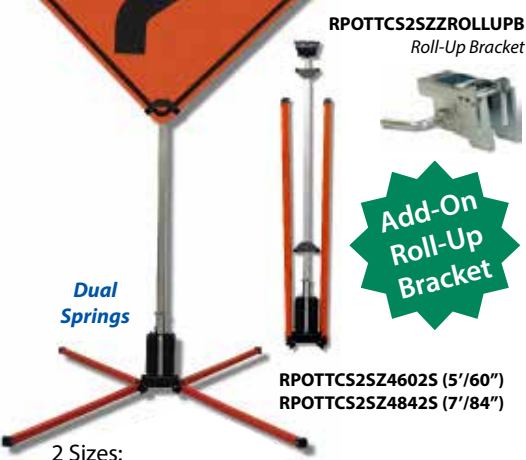

RPOTTCS2SZZROLLUPB
Roll-Up Bracket

RPOTTCS2SZ4602S (5' /60")
RPOTTCS2SZ4842S (7' /84")

2 Sizes:

- ◆ Above Grade Clearance of 5' /60" Weight: 42 lbs. | 48 lbs. w/rigid assembly
- ◆ Above Grade Clearance of 7' /84" Weight: 44 lbs. | 50 lbs. w/rigid assembly

STANDARD **Median Barrier Clamp**



- ◆ For use with 36" & 48" Roll-Up and/or Rigid Signs in no wind to high wind speed conditions.



- ◆ WindMaster® dual springs and telescoping upright.
- ◆ Attaches firmly to median barrier with four, screw-in T-handle spikes.
- ◆ 3- Flag Holder included, flags sold separately.

RPOTTCMBCSA114818K1- Roll-up Sign Holders | 5"-11" Clamp Range | 39.7 lbs
RPOTTCMBCSA114818K2- Rigid Sign Holder | 5"-11" Clamp Range | 40.85 lbs.
RPOTTCMBCSA114818K3- Rigid/Roll-up Sign Holders | 5"-11" Clamp Range
RPOTTCMBCSA154818K1- Roll-up Sign Holders | 9"-15" Clamp Range
RPOTTCMBCSA154818K2- Rigid Sign Holder | 9"-15" Clamp Range
RPOTTCMBCSA154818K3- Rigid/Roll-up Sign Holders | 9"-15" Clamp Range



STANDARD **Zephyr Stand**

- ◆ For use with 36" & 48" Roll-Up Signs in no wind to low wind speed conditions on low volume, rural or 2-lane roads.

- ◆ Above Grade Clearance of 12"
- ◆ Recycled rubber base folds to 4" high & has stacking lugs for easy transport & storage.

- ◆ Molded in carrying handles.

- ◆ Weight: 38 lbs.

RPOTTCTCR26000USH - Universal Bracket

